


MAJESTIC SLATE™

Universal Hip & Ridge

DESCRIPTION

Majestic Slate™ Hip and Ridge is a rubber and plastic-based ridge tile designed to provide the look and feel of natural stone slate in the ridge and hip portions of the roof. Used in conjunction with all EcoStar roofing tiles, Majestic Slate Hip and Ridge is manufactured with a state of the art formulation using recycled TPO and EPDM synthetic rubber materials.

Majestic Slate Hip and Ridge is 12" wide, 18" long and 1/4" thick and is available in nine (9) colors.

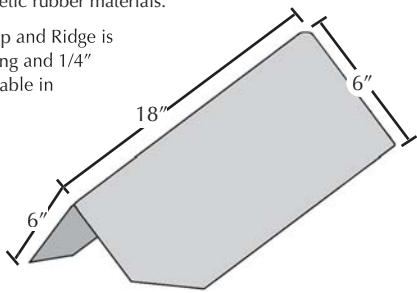

INSTALLATION

It is recommended that EcoStar® Majestic Slate Hip and Ridge tiles be installed by professional roofing applicators to ensure a quality installation.

The following are simplified steps for installing a Majestic Slate roofing system including the Hip and Ridge tiles. **Please refer to the Majestic Slate Installation Guide for specifics of installation.**

1. An approved deck is covered with EcoStar's **Glacier Guard™** where specified and either EcoStar's **Aqua Guard** and/or **VersaShield®** underlayment as needed per building code requirements.
2. When all field tiles have been applied to the roof slopes, the pre-formed ridge tiles are applied to all hips and ridges. Hip & Ridge tiles are always installed with a 6" exposure.
3. Nailing—Two per tile at designated locations on tile.

ADVANTAGES

Majestic Slate Hip and Ridge provides the look and feel of natural slate but with these added advantages:

- High impact resistance which provides protection from hail, falling branches, foot traffic, ice and snow damage.
- Majestic Slate Hip and Ridge can be installed up to 8 times faster than natural stone slate.
- The color in Majestic Slate Hip and Ridge has been added during formulation providing for color throughout the product. As with all natural roofing products, natural weathering will occur.
- EcoStar provides warranties for Majestic Slate for up to 50 years.

LIMITATIONS

Color Variation - All Majestic Slate Hip and Ridge tiles come with shade variation. This shade variation may occur differently from pallet to pallet. Application of the product should not begin until all material has been delivered to the project site. Because of this shade variation the applicator must take precautions to ensure that the various shades of the product are properly blended.

Tiles must be taken from different pallets and bundles to ensure consistency in application. **NOTE: EcoStar will not be responsible for the improper blending and application of the product.**

Temperature - It is recommended that Majestic Slate Hip and Ridge not be stored in temperatures lower than 45° F, since this may cause difficulty with installation of the product. If tiles have been stored in temperatures below 45° F, it is recommended that the tiles be brought back to an ambient material temperature above 45° F.

Substrate - Majestic Slate should only be installed on a minimum of 1/2" plywood, minimum 7/16" OSB or minimum 1" solid or plank wood decking. Majestic Slate should not be applied over existing roof materials. Existing roof materials must be removed down to the deck, prior to installation.

Underlayment - EcoStar's **Glacier Guard** or an approved equal must be applied in all hip and ridge areas, prior to tile installation.

Fasteners - Fasteners must be stainless steel **EcoStar Fasteners™**. **EcoStar Fasteners** are available in hand drive style in 2.0" and 2.5" lengths.

Ventilation - At the same time the ridge tiles are being installed, roof venting should be installed. EcoStar's **Eco Vent™** ridge venting is recommended for quality attic ventilation and an improved aesthetic appearance of the EcoStar roof system.

PRODUCT SPECIFICATIONS

FORMULATION		
Materials	EPDM / TPO	
PRODUCT CHARACTERISTIC		
Length	inches	18
Width	inches	12
Weight	lbs.	1.5
Thickness	inches	1/4 (nominal)
Tiles per linear foot	2 at required 6" exposure	
PHYSICAL PROPERTIES		
Operating Range	F.	-25 to 200°
Tensile (D-412)	psi	500
Water Absorption (D-570)	0% by wt.	
PACKAGING INFORMATION		
Tiles per bundle	10	
Weight per bundle	lbs.	15
Tiles per pallet	750	
Weight per pallet	lbs.	1125
Linear feet per bundle	feet	5

WARRANTIES

EcoStar warrants this product to be free of defects in workmanship and materials at the time of shipment from EcoStar's factory. EcoStar will at its option either supply new product or refund the purchase price of any product found to be defective hereunder.

EcoStar's limited warranties are the only warranties extended by EcoStar with respect to its materials. There are no other warranties, including the implied warranties of merchantability and fitness for a particular purpose. EcoStar specifically disclaims liability for any incidental, consequential, or other damages, including but not limited to, loss of profits or damages to a structure or its contents, arising under any theory of law whatsoever.

The dollar value of EcoStar's liability and buyer's remedy under this limited warranty shall not exceed the purchase price of the EcoStar material in question.



P.O. Box 7000 • Carlisle, PA 17013 • Tel: 800-211-7170 • Fax: 888-780-9870 • www.ecostar.carlisle.com